

# HDM04/08 Series

Simple Way To Protect What Matters To You Most



## About

Today's most efficient single solution for desk job and security is provided by new HDM All In One DVR series. HDM provides multi functionalities of normal PC monitor and high end video surveillance on single 23" Wide Screen Monitoring system. HDM will maximize the cost and space efficiency for a person who looks for multi systems on single desk. Multi cable connector allows easy installation and does not require additional power sources for multi cameras. HDM series will satisfy every needs of you business with one single solution.

## Features


- Independent Dual Display
- Triple Streaming / Digital Zoom
- Advanced User Authority Level
- Max 128ch CMS Client S/W
- POS (Text Insert Function)

## Specification


Model	HDM04	HDM08	
Video	In	4 Ch (RJ-45, without Loop-out)	8 Ch (RJ-45, without Loop-out)
	Aux In	External VGA Input Display	
	Out	Built-in 23inch TFT LCD (16:9)	
Audio	In	4 Ch (RJ-45)	8 Ch (RJ-45)
	Out	1 Line-out, Built-in Speaker	
Power	Out	4 Ch (RJ-45, Camera Power)	8 Ch (RJ-45, Camera Power)
	Sensor In	4TTL	
Device	Alarm Out	2 Relay + 2 TTL	
	I/O Interface	RS-232, RS-485, USB2.0, USB1.1	
	Speed	Real Time	
Display	Resolution	720 x 480 (NTSC), 720x576(PAL)	
	Split Screen	1, 4, PIP, Digital Zoom	1, 4, 9, PIP, Digital Zoom
	Compression	H.264 Codec	
	Speed / Resolution	120fps@CIF(NTSC) / 100fps@CIF(PAL) 60fps@Half D1(NTSC) / 50fps@Half D1(PAL) 30fps@D1(NTSC) / 25fps@D1(PAL)	
Recording	Picture Quality	Very High, High, Standard, Low	
	Mode	Time-lapse, Event, Time&Event,	
	Display	1, 4, Digital Zoom	1, 4, 9, Digital Zoom
Playback	Search Mode	Calendar Search, Event Search, Text-In Search, Go to Time	
	Playback Mode	Multi Channel Normal & Reverse Play, RW & FF ( x2, x4, x8, x16, x32), Frame to Frame, Pause	
	Network Interface	Ethernet (10/100 Base)	
Network	Protocol	TCP/IP, HTTP, DHCP	
	Application	Live, Playback, Setup, Notification (Callback, E-Mail)	
	Web Browse	Internet Explorer 7 or higher	
	Storage	1 x SATA HDD	
Backup	External ODD, HDD, USB Memory		
Control	USB Mouse, IR Remote Controller, Joystick Controller		
OSD	Graphic User Interface (Multilingual)		
Approval	FCC, CE, KCC		
ROHS	ROHS Compliance		
Power Consumption	DC12V, 6.67A (80W)		
Operating Temperature	5°C ~ 40 C / 41°F~104°F		
Operating Humidity	0%~80% / non-condensing		
Dimension	574(W) x 395(H) x 250(D) mm / 22.6(W) x 15.5(H) x 9.84(D) inch		
Weight	7.7Kg / 17.0lbs (without HDD)		

\*Specification & Design are subject to change without prior notice


## Demension

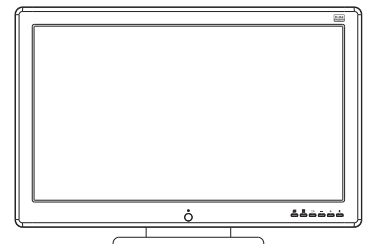

HDM08 Front View



HDM08 Side View

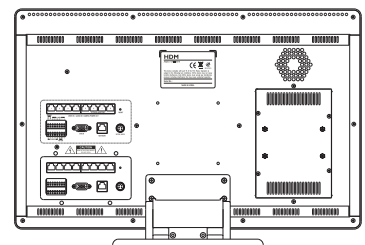

HDM08 Rear View