



# Clebo WAIF-130D55

1.3MEGAPIXEL 1000TVL AHD 55 IR LED BULLET CAMERA

1.3Megapixel 720P High Resolution

IR LED 55ea

True Day & Night

2D+3D DNR (Digital Noise Reduction)

D-WDR (Digital Wide Dynamic Range)

Smart IR

LSC (Lens Shading Compensation)

DPC (Defect Pixel Compensation)

Motion Detection

Privacy Mask


Selectable TV System NTSC/PAL




[www.in-con.biz](http://www.in-con.biz)

# Clebo WAIF-130D55

## Demension

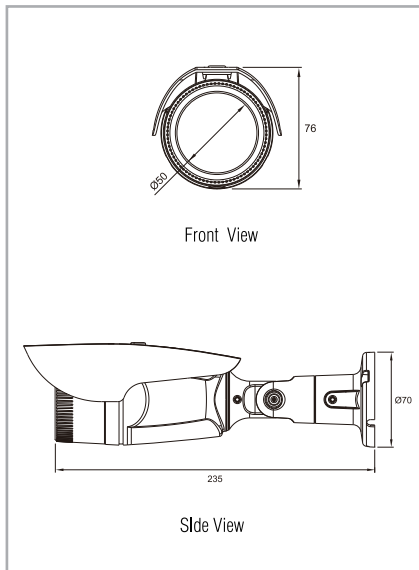

## IR LED VISIBILITY RANGE

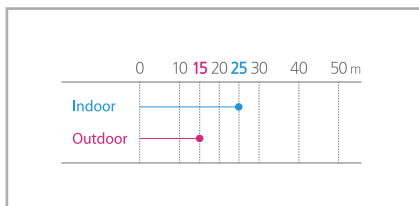

## Specification

Clebo WAIF-130D55	
Image Sensor	1/3" 1.3Megapixel CMOS
Total Pixels	1312(H) x 1069(V) = 1.4M (pixels)
Effective Pixels	1305(H) x 1049(V) = 1.37M (pixels)
Scanning System	Progressive
Resolution	720P / Max. 1000TVL
Video Output	Analog HD : 720P
	Analog CVBS : 1280H NTSC/PAL
S/N Ratio	More than 50dB (AGC Off)
Min. Illumination	Color : 1.0Lux / BW : 0.5Lux /
	Color DSS : 0.002Lux / BW DSS : 0.0008Lux / IR LED On : 0Lux
Lens	Megapixel Fixed Lens f=3.6mm
IR LED	55ea
Electronic Shutter Speed	Auto / Manual (1/50(60) ~ 1/50,000sec)
Sens-up	x2 ~ x30
White Balance	ATW / AWC / Indoor / Outdoor / Manual / AWB
Auto Gain Control	0 ~ 15
BLC	Off / BLC / HSBLC
D-WDR	On / Off / Auto
Day & Night	Auto / Color / BW / EXT
2D+3D DNR	Off / Low / Middle / High
Smart IR	On / Off
LSC	On / Off
DPC	Live DPC / White DPC / Black DPC
Defog	Off / Auto
Brightness	0 ~ 100
Sharpness	0 ~ 10
Privacy Mask	Off / On (4 area)
Motion Detection	Off / On (4 area)
Mirror	Off / Mirror / V-Flip / Rotate
Operating Temperature	-10°C ~ +50°C
Operating Humidity	30% ~ 90% RH
Power Source	DC 12V (±10%)
Power Consumption	8.4W
Dimension	70(Ø) x 76(H) x 235(D)mm

\*Specification & Design are subject to change without prior notice

# INCON

INCON Co., Ltd. Mario Tower 7F, 28, Digital-ro 30-gil, Guro-gu, Seoul, Korea, 152-050  
 Tel:+82-2-558-9130, +82-31-455-8600 Email : sales@in-con.biz www.in-con.biz