



# Clebo WASF-130D

1.3MEGAPIXEL 1000TVL AHD SMALLEST MINIATURE CAMERA


1.3Megapixel 720P High Resolution  
2D+3D DNR (Digital Noise Reduction)  
D-WDR (Digital Wide Dynamic Range)  
LSC (Lens Shading Compensation)  
DPC (Defect Pixel Compensation)  
Motion Detection  
Privacy Mask  
OSD Control



[www.in-con.biz](http://www.in-con.biz)

# Clebo WASF-130D

## Demension

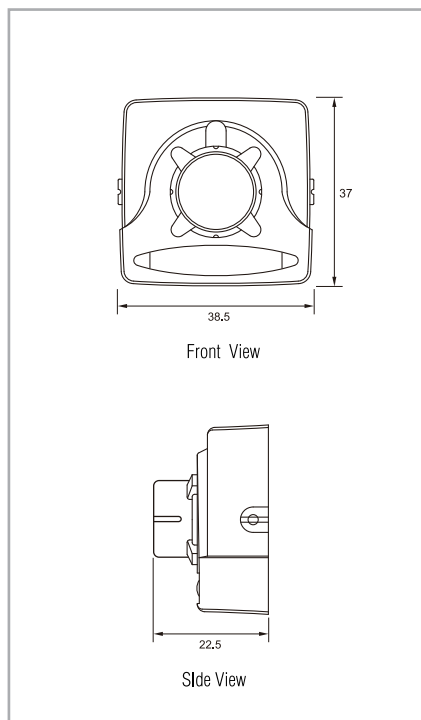

## Specification

| Clebo WASF-130D          |   |
|--------------------------|---|
| Image Sensor             | 1/3" 1.3Megapixel CMOS                      |
| Total Pixels             | 1312(H) x 1069(V) = 1.4M (pixels)           |
| Effective Pixels         | 1305(H) x 1049(V) = 1.37M (pixels)          |
| Scanning System          | Progressive                                 |
| Resolution               | 720P / Max. 1000TVL                         |
| Video Output             | Analog HD : 720P                            |
|                          | Analog CVBS : 1280H NTSC/PAL                |
| S/N Ratio                | More than 50dB (AGC Off)                    |
| Min. Illumination        | Color : 1.0Lux / BW : 0.5Lux /              |
|                          | Color DSS : 0.002Lux / BW DSS : 0.0008Lux   |
| Lens                     | Megapixel Fixed Lens f=3.6mm                |
| Electronic Shutter Speed | Auto / Manual (1/50(60) ~ 1/50,000sec)      |
| Sens-up                  | x2 ~ x30                                    |
| White Balance            | ATW / AWC / Indoor / Outdoor / Manual / AWB |
| Auto Gain Control        | 0 ~ 15                                      |
| BLC                      | Off / BLC / HSBLC                           |
| D-WDR                    | On / Off / Auto                             |
| Day & Night              | Auto / Color / BW / EXT                     |
| 2D+3D DNR                | Off / Low / Middle / High                   |
| LSC                      | On / Off                                    |
| DPC                      | Live DPC / White DPC / Black DPC            |
| Defog                    | Off / Auto                                  |
| Brightness               | 0 ~ 100                                     |
| Sharpness                | 0 ~ 10                                      |
| Privacy Mask             | Off / On (4 area)                           |
| Motion Detection         | Off / On (4 area)                           |
| Mirror                   | Off / Mirror / V-Flip / Rotate              |
| Operating Temperature    | -10°C ~ +50°C                               |
| Operating Humidity       | 30% ~ 90% RH                                |
| Power Source             | DC 12V (±10%)                               |
| Power Consumption        | 3.6W  |
| Dimension                | 38.5(W) x 37(H) x 22.5(D)mm                 |
| Weight                   | Appx. 100g                                  |

\*Specification & Design are subject to change without prior notice

## INCON

INCON Co., Ltd. Mario Tower 7F, 28, Digital-ro 30-gil, Guro-gu, Seoul, Korea, 152-050  
 Tel:+82-2-558-9130, +82-31-455-8600 Email : sales@in-con.biz www.in-con.biz