

# FD04X Series

## H.264 FULL HD 4CH

Triple Streaming / Digital Zoom

Advanced User Authority Level

Max 128ch CMS Client S/W


POS (Text Insert Function)



H.264 FULL HD 4CH

# FD04X Series

## Demension

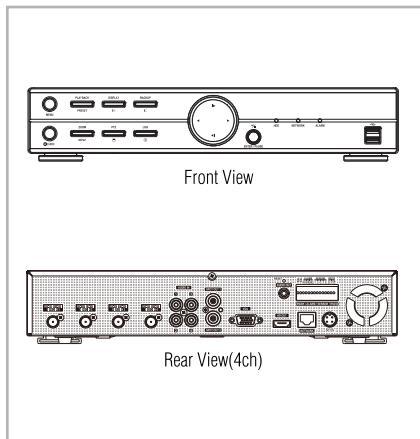

## Specification

In		FD04X
Video	Format/Resolution	4 BNC (No Loop-out)
	Out	HD-SDI, EX-SDI / 1080p30
	Analog I	1 HDMI, 1 VGA, 2 CVBS(Spot)
Audio	In	4 RCA (Line Input)
	Out	1 HDMI, 1 RCA (Line Output)
Device	Sensor In	4 TTL (3+Emergency)
	Alarm Out	2 TTL
	I/O Interface	RS232 x 1, RS485 x 1, USB(2.0) x 2
Display	Speed	Realtime
	Resolution	720 x 480 (NTSC), 720 x 576 (PAL), Maximum 1080p@60 fps for HDMI
	Split Screen	1, 4, PIP, Digital Zoom
Recording	Compression	H.264 Codec & ADPCM
	Speed / Resolution	60fps@1080p/60fps@1080p
		120fps@720p/120fps@720p
	Picture Quality	(Encoding/Decoding)
		Very High, High, Standard, Low
Playback	Mode	Time-lapse, Event, Time & Event, Emergency (Panic)
	Display	1, 4, Digital Zoom
	Search Mode	Calendar Search, Event Search, Text-In Search, Go to Time
	Playback Mode	Multi Channel Normal & Reverse Play, RW & FF ( x2, x4, x8, x16, x32), Frame to Frame, Pause
Network	Network Interface	Giga-bit Ethernet (10/100/1000 Base)
	Protocol	TCP/IP, HTTP, DHCP, ADSL(PPPoE), RTP/RTSP
	Application	Live, Playback, Setup, Notification (Callback, E-Mail)
	Web Browse	Internet Explorer 7 or higher
	Mobile Support	iPhone, Android Phone (Real Streaming)
Storage	SATA	2 Port (Default)
Backup	Internal	N/A
	External	USB Flash, USB HDD, USB DVD(TBD), USB BD(TBD)
Control		Front Panel Button, USB Mouse, IR Remote Controller, Joystick Controller
OSD		Graphic User Interface (Multilingual)
Certification		FCC, CE, KC
ROHS		ROHS Compliance
Power Consumption		DC12V
Operating Temperature		5°C ~ 40°C / 41°F~104°F
Operating Humidity		0%~80% / non-condensing
Dimension		1.5U - 340(W)x67(H)x267(D)mm /13.39(W)x2.64(H)x10.43(D)inch
Weight		TBD

\*Specification & Design are subject to change without prior notice

# INCON

INCON Co., Ltd. Mario Tower 7F, 28, Digital-ro 30-gil, Guro-gu, Seoul, Korea, 152-050  
Tel:+82-2-558-9130, +82-31-455-8600 Email : sales@in-con.biz www.in-con.biz