



FD08X/FD16X Series

H.264 FULL HD 8CH/16CH

Triple Streaming / Digital Zoom

Advanced User Authority Level

Max 128ch CMS Client S/W

POS (Text Insert Function)




www.in-con.biz

H.264 FULL HD 8CH/16CH

FD08X&16X Series

Demension

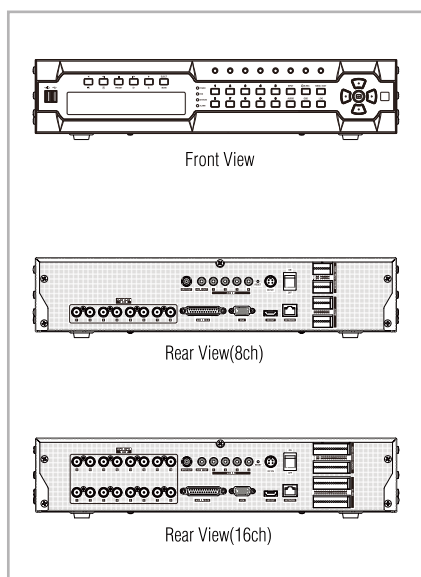

Specification

		FD08X	FD16X
Video	In	8 BNC (No Loop-out)	16BNC (No Loop-out)
	Format/Resolution	HD-SDI, EX-SDI / 1080p30	
	Out	1 HDMI, 1 VGA, 1 CVBS(Spot)	
Audio	In	4 RCA / D-sub(8ch)	4 RCA / D-sub(16ch)
	Out	1 HDMI, 1 RCA (Line Output)	
Device	Sensor In	4 TTL (3+Emergency)	
	Alarm Out	2 TTL	
	I/O Interface	RS232 x 1, RS485 x 1, USB(2.0) x 2	
Display	Speed	Realtime	
	Resolution	720 x 480 (NTSC), 720 x 576 (PAL), Maximum 1080p@60 fps for HDMI	
	Split Screen	1, 4, 9, PIP, Digital Zoom	1, 4, 6, 9, 13, 16, PIP, Digital Zoom
Recording	Compression	H.264 Codec & ADPCM	
	Speed / Resolution	120fps@1080P/120fps@1080P 240fps@720P/240fps@720P (Encoding/Decoding)	240fps@1080p/120fps@1080p 480fps@720p/240fps@720p (Encoding/Decoding)
	Picture Quality	Very High, High, Standard, Low	
	Mode	Time-lapse, Event, Time & Event, Emergency (Panic)	
Playback	Display	1, 4, 9, PIP, Digital Zoom	1, 4, 6, 9, 13, 16, PIP, Digital Zoom
	Search Mode	Calendar Search, Event Search, Text-In Search, Go to Time	
	Playback Mode	Multi Channel Normal & Reverse Play, RW & FF (x2, x4, x8, x16, x32), Frame to Frame, Pause	
Network	Network Interface	Giga-bit Ethernet (10/100/1000 Base)	
	Protocol	TCP/IP, HTTP, DHCP, ADSL(PPPoE), RTP/RTSP	
	Application	Live, Playback, Setup, Notification (Callback, E-Mail)	
	Web Browse	Internet Explorer 7 or higher	
	Mobile Support	iPhone, Android Phone (Real Streaming)	
Storage	SATA	2 Port (Default)	
Backup	Internal	N/A	
	External	USB Flash, USB HDD, USB DVD(TBD), USB BD(TBD)	
Control		Front Panel Button, USB Mouse, IR Remote Controller, Joystick Controller	
OSD		Graphic User Interface (Multilingual)	
Certification		FCC, CE, KC	
ROHS		ROHS Compliance	
Power Consumption		DC12V	
Operating Temperature		5°C ~ 40°C / 41°F~104°F	
Operating Humidity		0%~80% / non-condensing	
Dimension		2U - 430(W)x92.5(H)x428(D)mm	
		/16.93(W)x3.64(H)x16.85(D)inch	
Weight		TBD	

*Specification & Design are subject to change without prior notice

INCON

INCON Co., Ltd. Mario Tower 7F, 28, Digital-ro 30-gil, Guro-gu, Seoul, Korea, 152-050

Tel: +82-2-558-9130, +82-31-455-8600 Email : sales@in-con.biz www.in-con.biz