



NetSafe NVR Series

Network Digital Video Recorder

Supports Up to Real-time 64 IP-CHs
Pentaplex

Intuitive User-friendly interface

Full frame real time Recording

System Auto-Recovery


Multi-scenario/ Event-driven Recording schedule

Variety of Search

Smart Phone Viewer



Demension

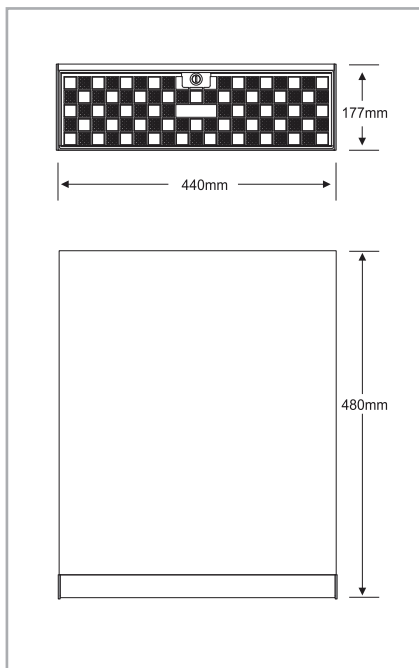

Specification

NetSafe NVR-H164	
General	
Video Format	NTSC/PAL
Video Input	Up to 64Ch capable
Video Output	1 VGA/1HDMI
Display Mode	Two section : 1,4,7,9,10,13,16 sequence / 4-DIV Group (4-Split Screen)
Display speed	Depends on the connected IP device (VSs, IP Cameras)
Recording Resolution	Depends on the connected IP device (VSs, IP Cameras)
Audio In/Out	16IP/1RCA
Alarm In/Out	Depends on the connected IP device (VSs, IP Cameras)
Detailed Spec.	
Recording Rate	Real-time Recording (Depends on the connected IP device)
Compression Type	Depends on the connected IP device (VSs, IP Cameras)
Operating System	Microsoft Window 7 Embedded
Storage	Built-in 500GB (Up to 4HDDs), DVD-RW
Backup Interface	USB memory, External HDD/ODD, Network Backup
Backup Format	Backup Viewer(Exclusive File Format)-Export AVI, JPEG
Network Connection	Gigabit Ethernet(10/100/1000Mbps)
RS232	POS/ATM or External Keyboard Controller
RS485/422	PTZ control or External Keyboard Controller
USB	USB 2.0 (480Mbps)
Additional Functions	
Recording Mode	Event-Driven (Motion,Sensor), Schedule, Instant, Intensive Recording
Search Mode	Backup ,Preview, Object, Index, Bookmark, Panorama(Optional), POS (optional)
Motion Detection	Motion detection Areas and Sensitivity Setting
Tolerance	Watchdog, External UPS (Optional)
Water mark	Support
Two-away Audio	Support
Others	Remote S/W,(Remote, iDVR, Emergency Agent),Backup Viewer, Image Cleaning, SYNC
Dimension & Environment	
Dimension (W x H x D)	438mm x 138.2mm x 490mm (3U)
Weight	20kg
Operating Temperature	5℃ ~40℃
Humidity	10~80%
Power Requirement	100V~240V AC
Power consumption	130W

*Specification & Design are subject to change without prior notice