

Clebo MT/QT

Indoor&Outdoor Mini Speed Dome Camera



제품특징

- 41만 화소, 1/4" Interline Transfer CCD
- 광학 10배, 디지털 10배 줌
- Day & Night (ICR)
- SNR(Super Noise Reduction)
- 초저조도 0.7Lux(Color) / 0.02Lux(B/W), 50IRE
- IPS 기능(개별 프리셋, 이미지 설정기능)
- 4 패턴, 8스윙, 8그룹 설정기능
- Auto Flip, Auto Parking, Power-up Action
- OSD 기능 지원
- 센서 입/출력 기능 (4 In)



IP 제품을 통한 소프트웨어

- Remote (실시간 영상감시 및 DVR 원격 제어/관리)
- I DVR (웹 브라우저를 통한 실시간 영상 감시)
- NxMS (CMS를 통한 다양한 모니터링 감시 및 제어/관리)

제품사양

카메라		MTon-10TP/TN	QTon-10TP/TN
촬상소자		1/4" Interline Transfer CCD	
유효 화소수		380K Pixel (768(H) x 494(V))	
S/N 비		50dB (AGC off)	
줌 배율		10 × optical zoom & 10x Digital Zoom	
초점거리		F1.8, f=3.8~38mm	
초저조도		0.7Lux(Color) / 0.02Lux(B/W), 50IRE	
Day & Night (ICR)		Auto / Day / Night (IR Cut Filter)	
초점거리		F1.8 / f=3.8 ~ 38 mm	
Iris		Auto / Manual	
셔터스피드		x128 ~ 1/120000sec	
AGC		Normal / High / Off	
화이트 밸런스		Auto / Manual (Red, Blue Gain Adjustable)	
BLC		Low / Middle / High / Off	
프라이버시		4 Marks (Spherical Coordinate)	
Pan/Tilt			
회전속도		Pan : 360° (Endless), Tilt : 180°	
Speed	Preset	360° /sec	
	Jog	0.05 ~ 360° /sec (Proportional to Zoom)	
	Swing	1° ~ 180° /sec	
Preset		127 Presets	
패턴 투어		4 Patterns (1200 command/Pattern)	
Swing		8 Swings	
Group		8 Groups (20 Actions/Group)	
통신			
Type		RS-485	
PTZ Protocol		Pelco-D, Pelco-P Selectable	
센서/알람			
Sensor		3inputs, (Photo-Coupler Input)	
Alarm		—	
규격			
Mount Accessory		Wall Mount or Ceiling Mount, Flush Mouth	Wall Mount or Ceiling Mount, Sun-shield
Dimension		Dome: Ø115 mm / 4.5"	
Weight		Wall: Approx 2.1kgs	Ceiling: Approx 1.5kgs
Material		Dome: Polycarbonate	Internal: Polycarbonate, ABS
사용전원		DC12V, 0.8A	DC12V, 3A
방진/방수		-	IP 67
Fan		-	Always ON
Heater		-	Operation start from Internal Temperature 10° C
동작온도		0° C ~ 40° C / 32° F ~ 104° F	-10° C ~ 50° C / 14° F ~ 122° F

외관도

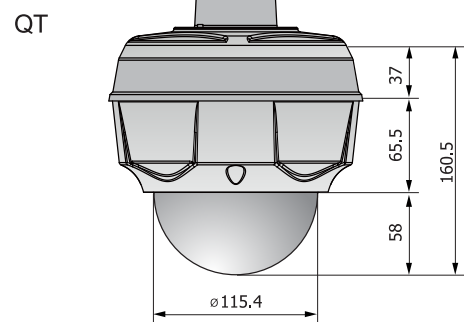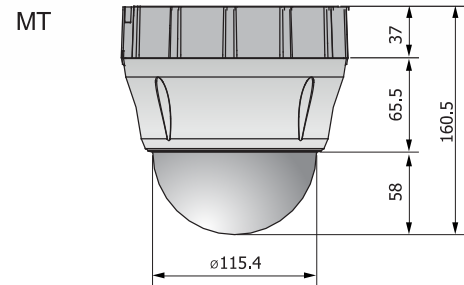

악세사리 외관도

